

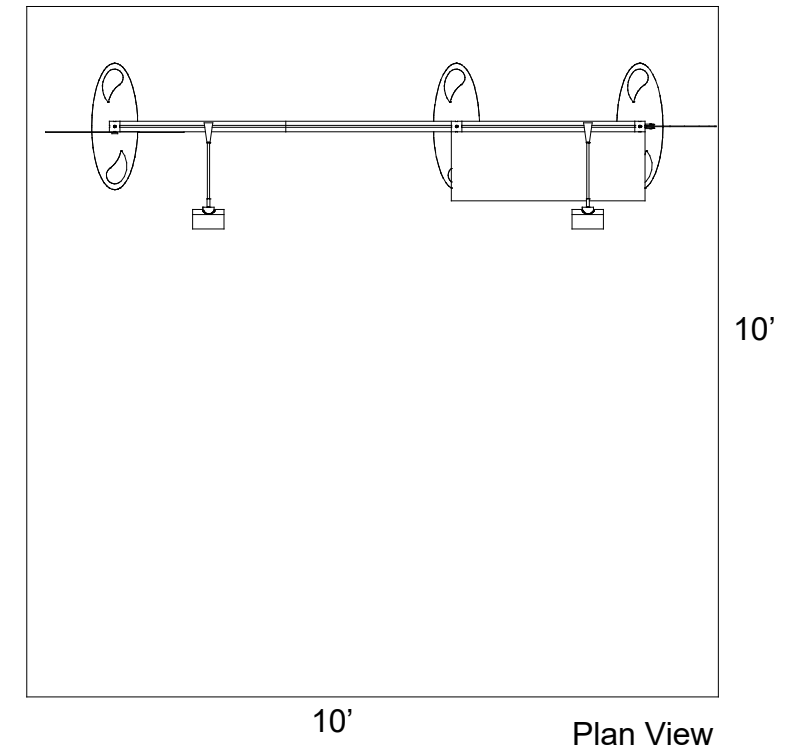


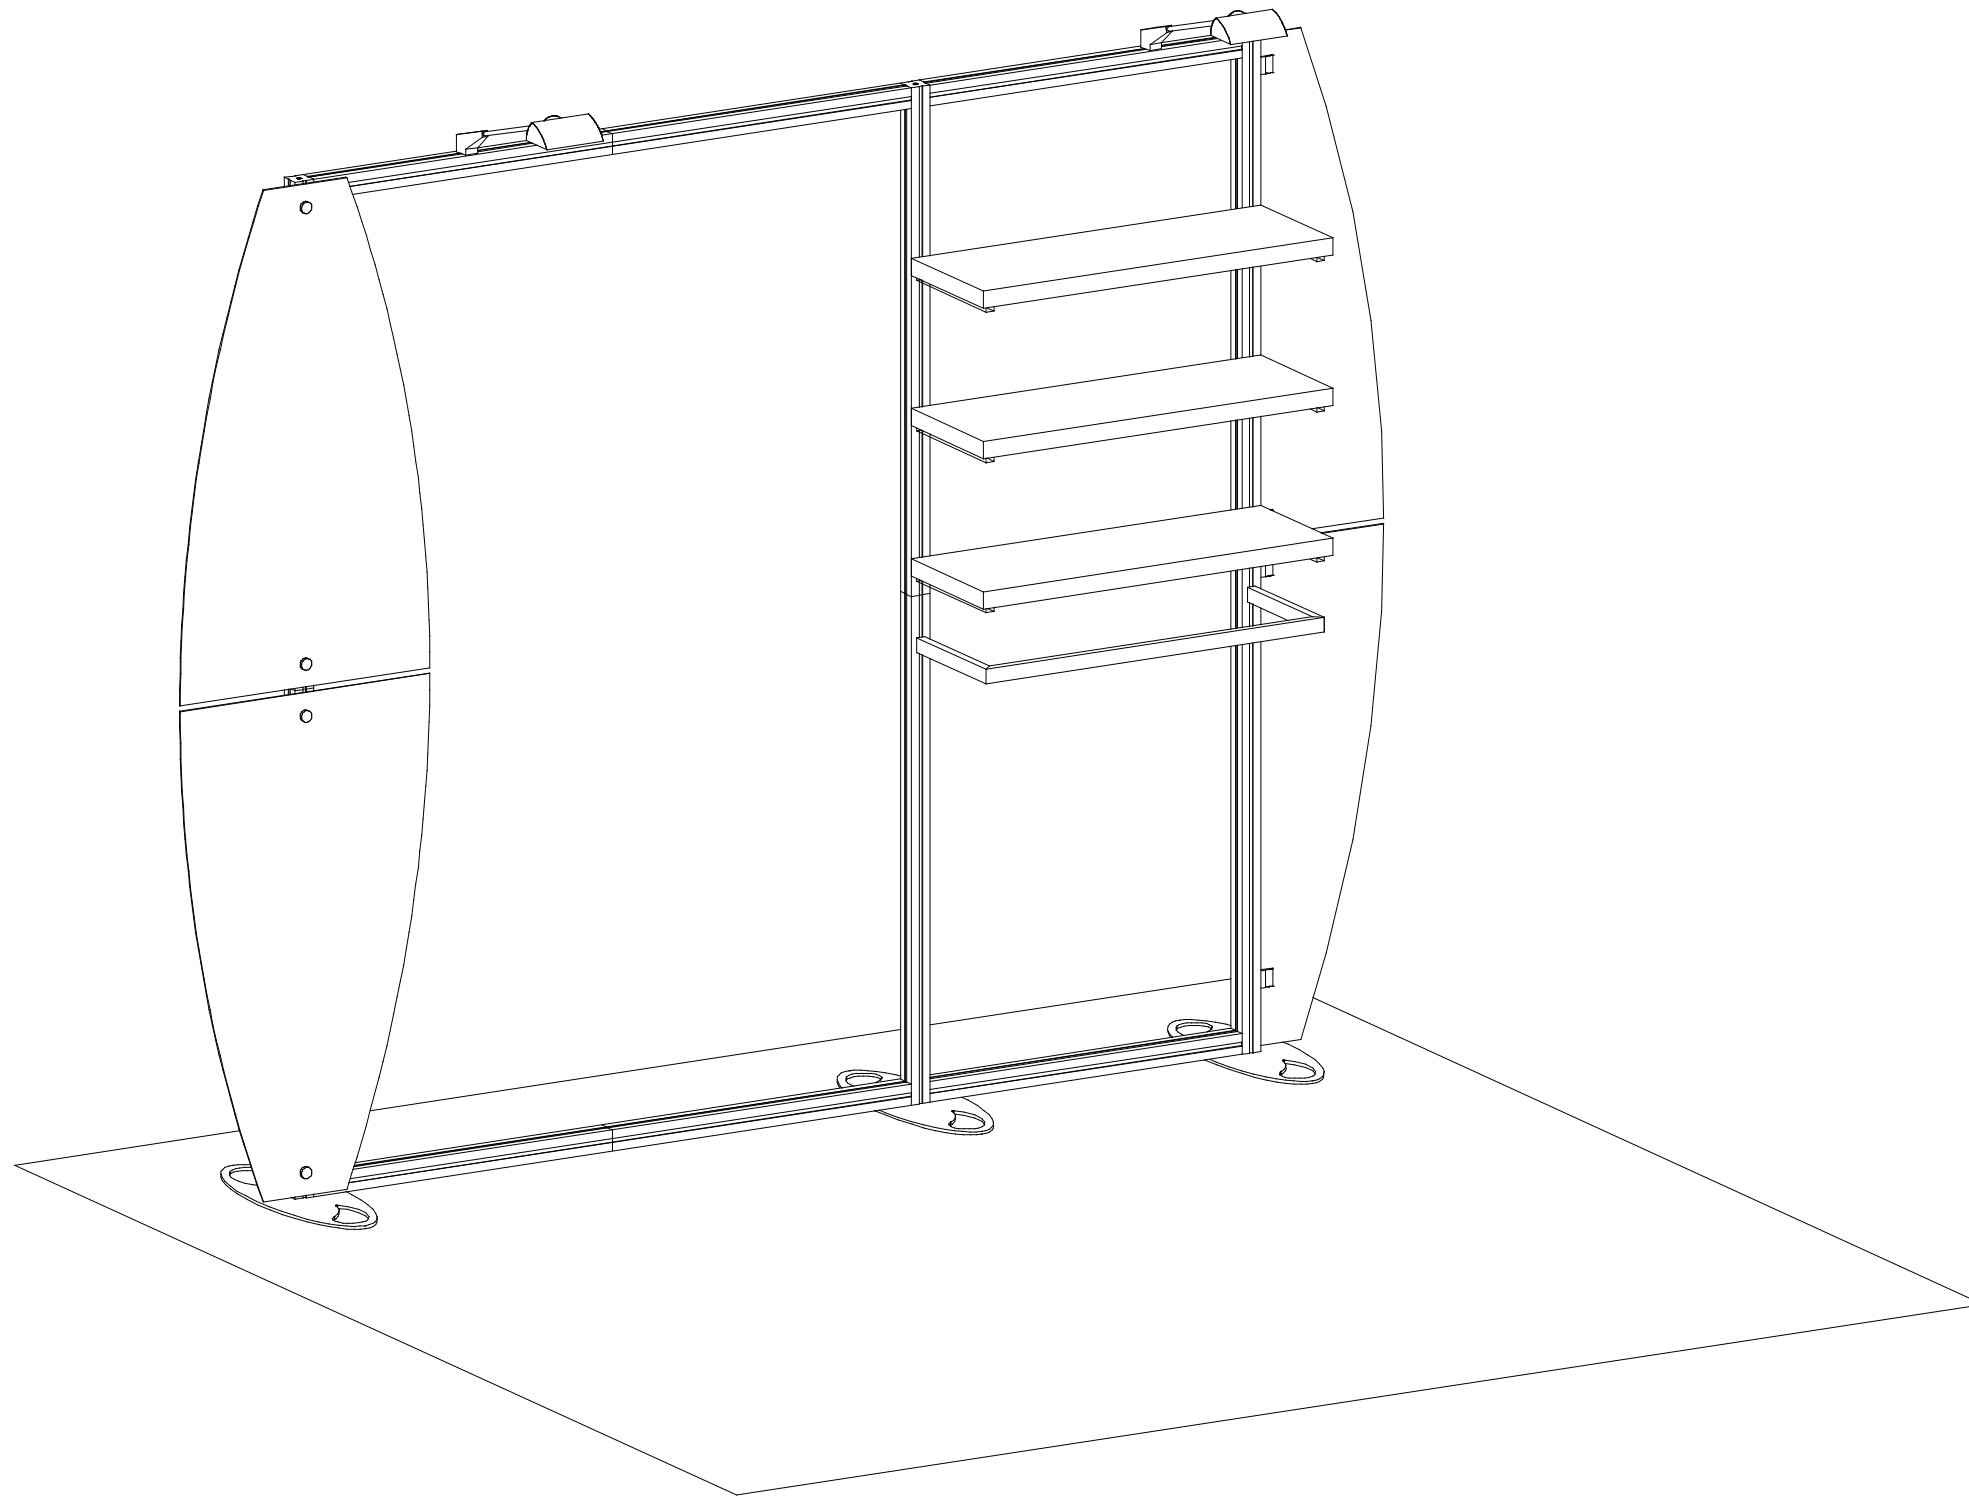


SETUP INSTRUCTIONS

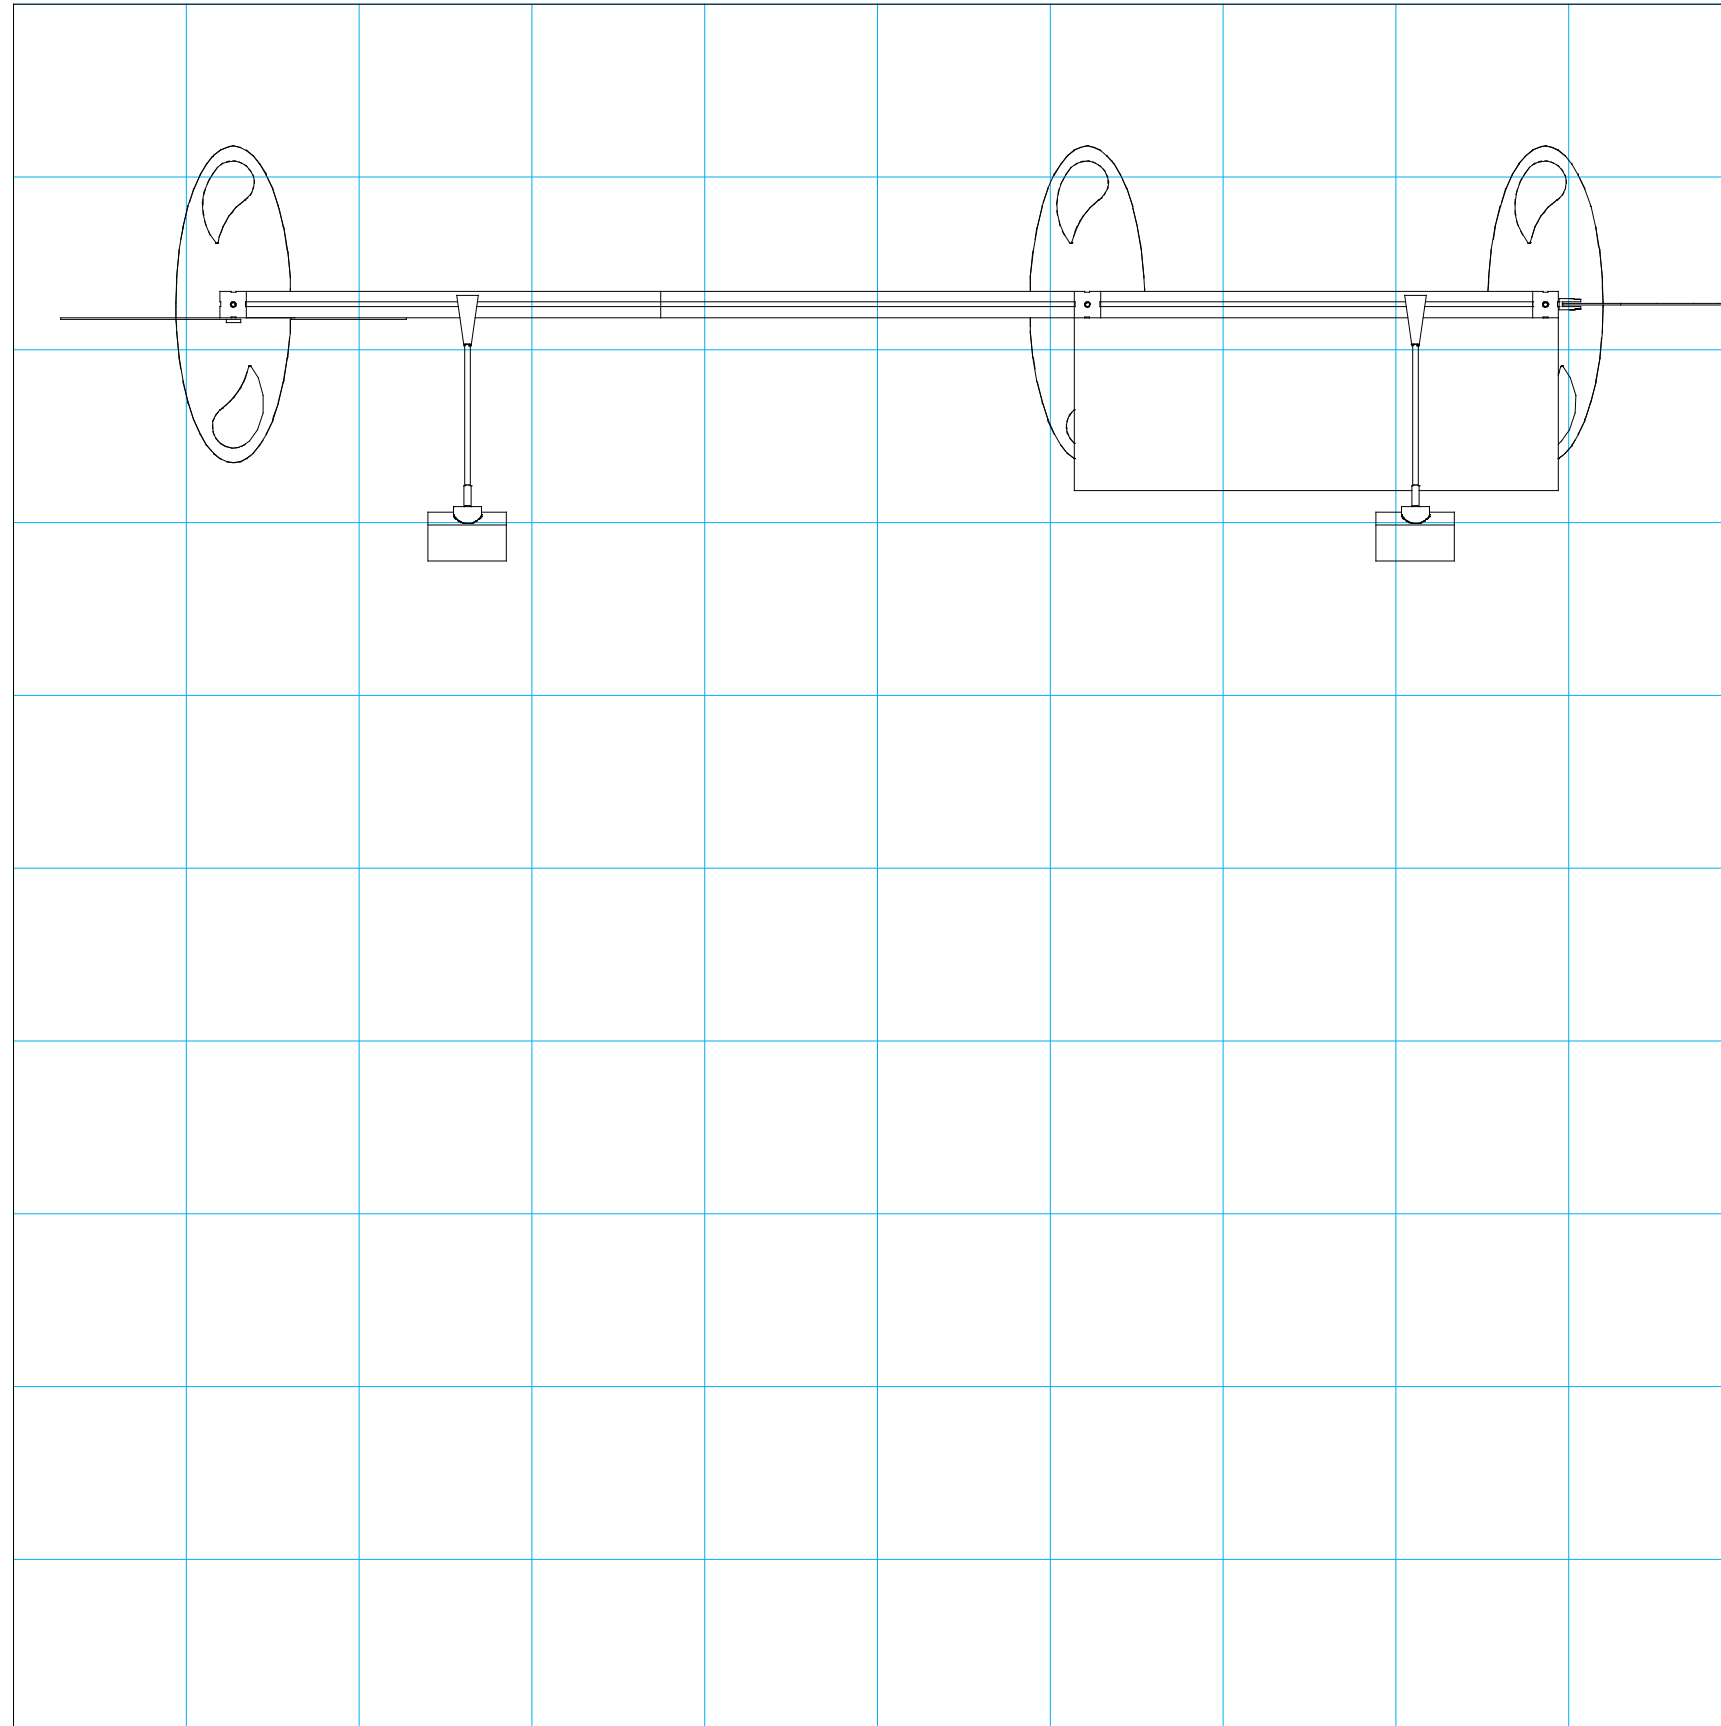


= 1 sq foot

General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

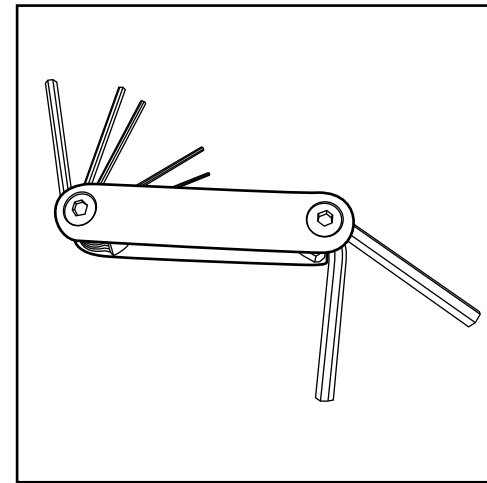

Hex Tool - Essential for Assembly

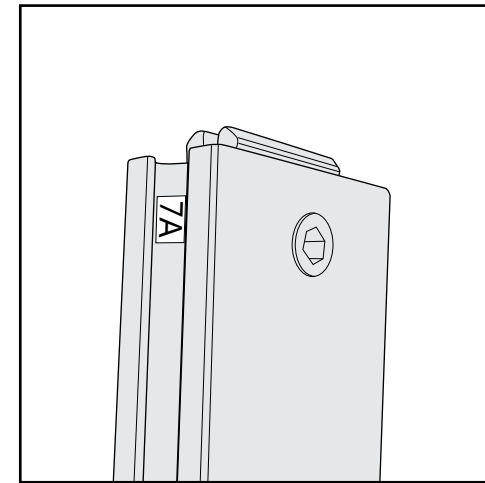

Part Identification - Numbering




WARNING

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly

- For loss prevention, tighten all set screws and locks during disassembly.

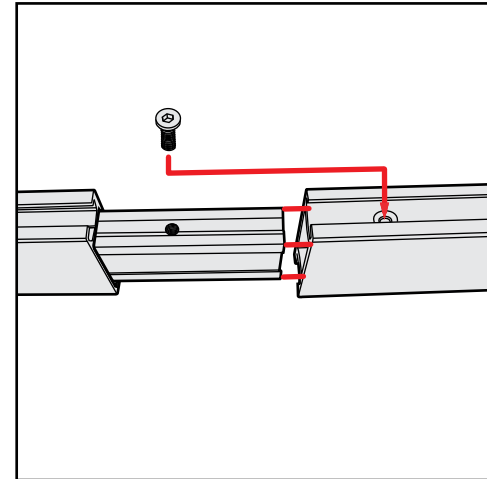


Spline Connection

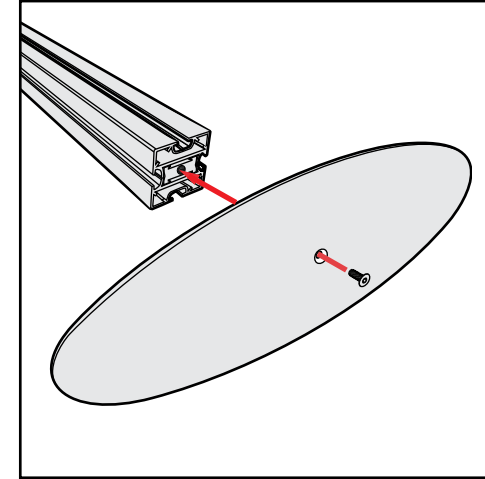


Base Plate & Extrusion Connection




DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED

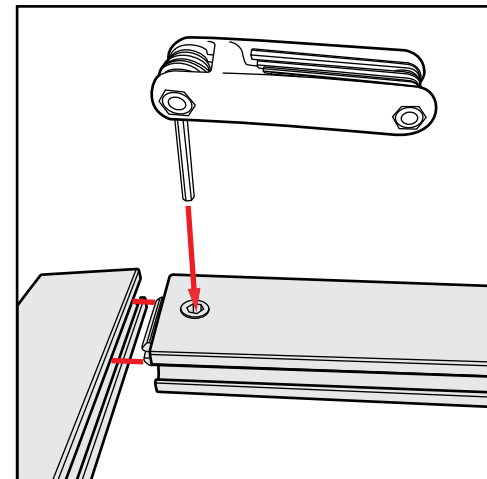

Extrusion & Lock Connection

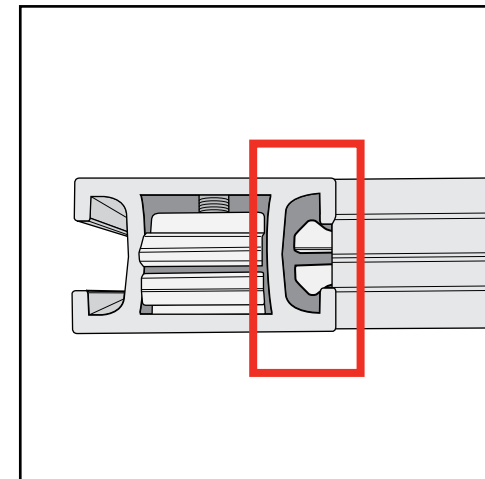


Engaged Lock




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Top View of Each Level

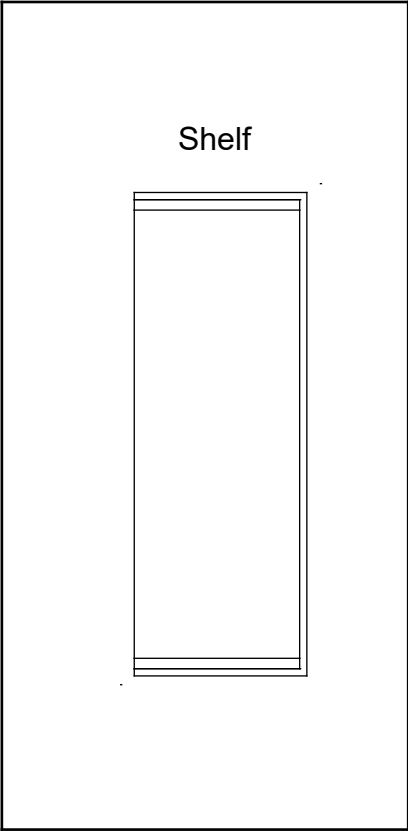



Level 1

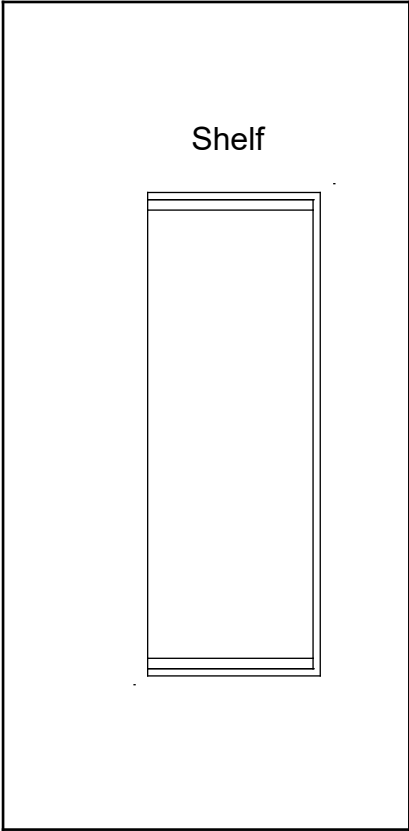


Level 2

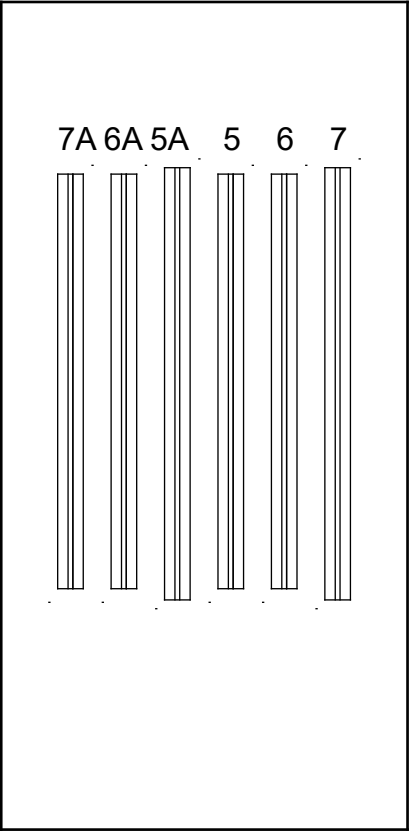


Level 3

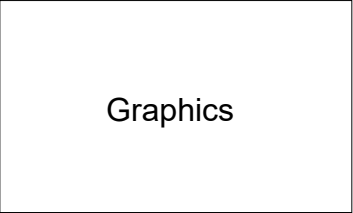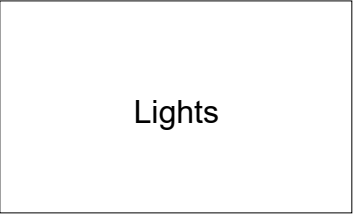


Top View of Each Level

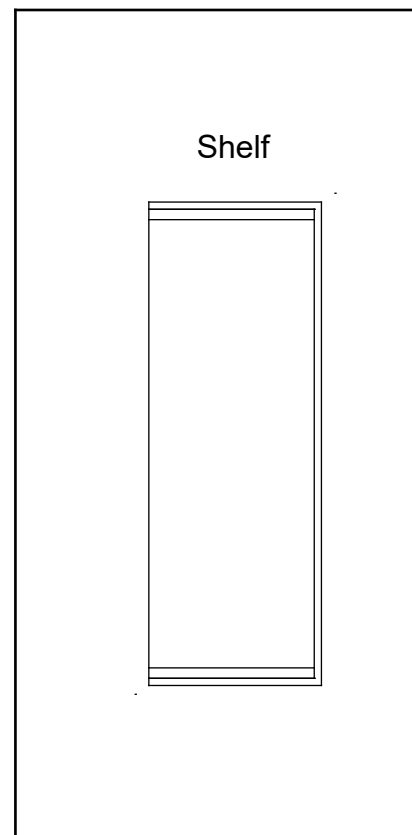


Level 1

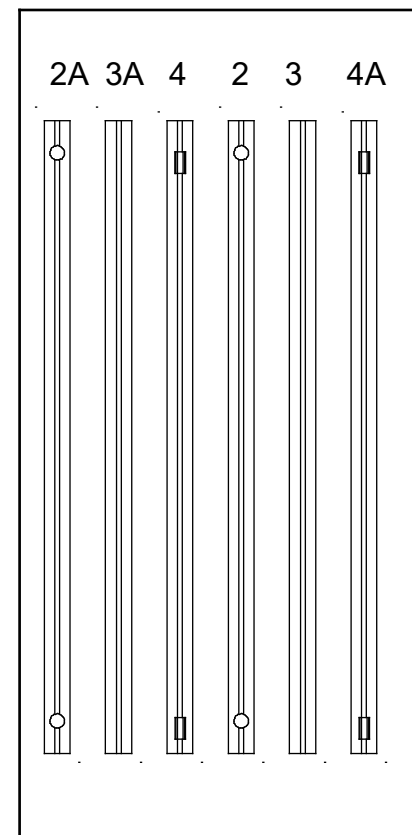

Level 2

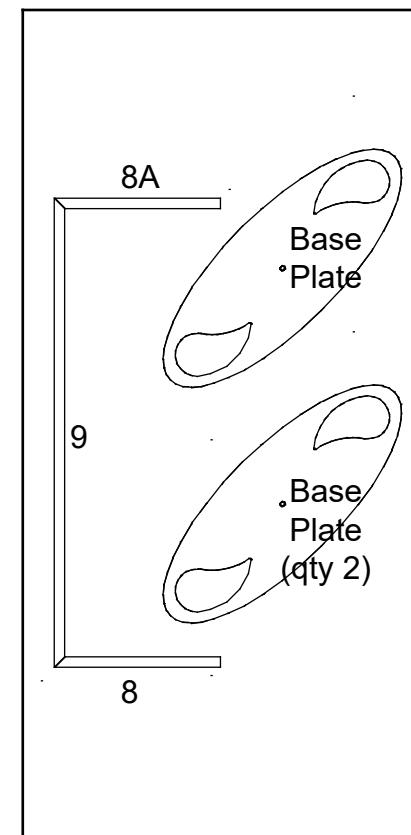

Level 3


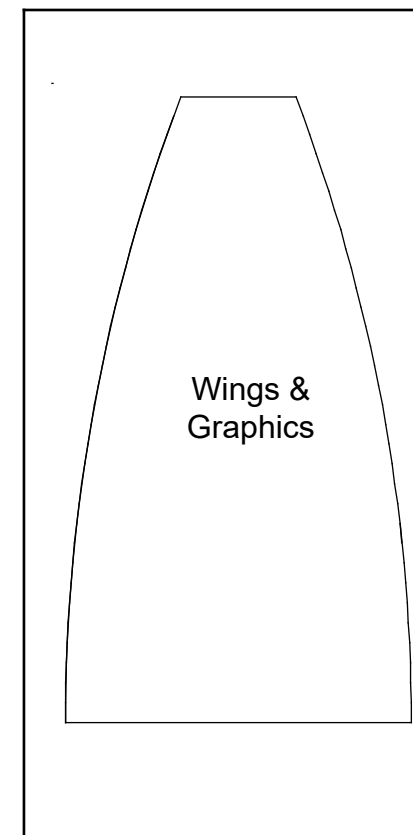


Level 4


Item	Qty.	Description
1	3	Base Plate
2/2A	1/1	44"h S44 Vertical Extrusion
3/3A	1/1	44"h S44 Vertical Extrusion
4/4A	1/1	44"h S44 Vertical Extrusion
5/5A	1/1	28.75"w S44 Horizontal Extrusion
6/6A	1/1	28.75"w S44 Horizontal Extrusion
7/7A	1/1	30"w S44 Horizontal Extrusion

Steps:

- 1) Connect base plates [1] to bottom of lower verticals [2,3,4].
- 2) Attach verticals [2-2A], [3-3A], [4-4A] together.
- 3) Install horizontals [5-6], [5A-6A] between vertical assemblies [2/2A] & [3/3A].
- 4) Connect horizontals [7,7A] between vertical assemblies [3/3A] & [4/4A].
- 5) Attach graphics to back of frame using [Velcro](#).

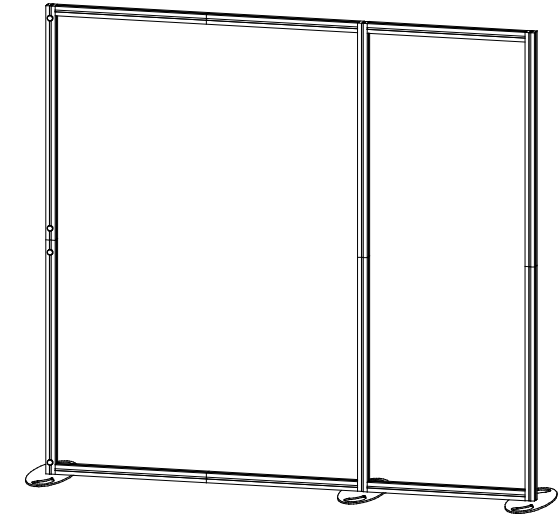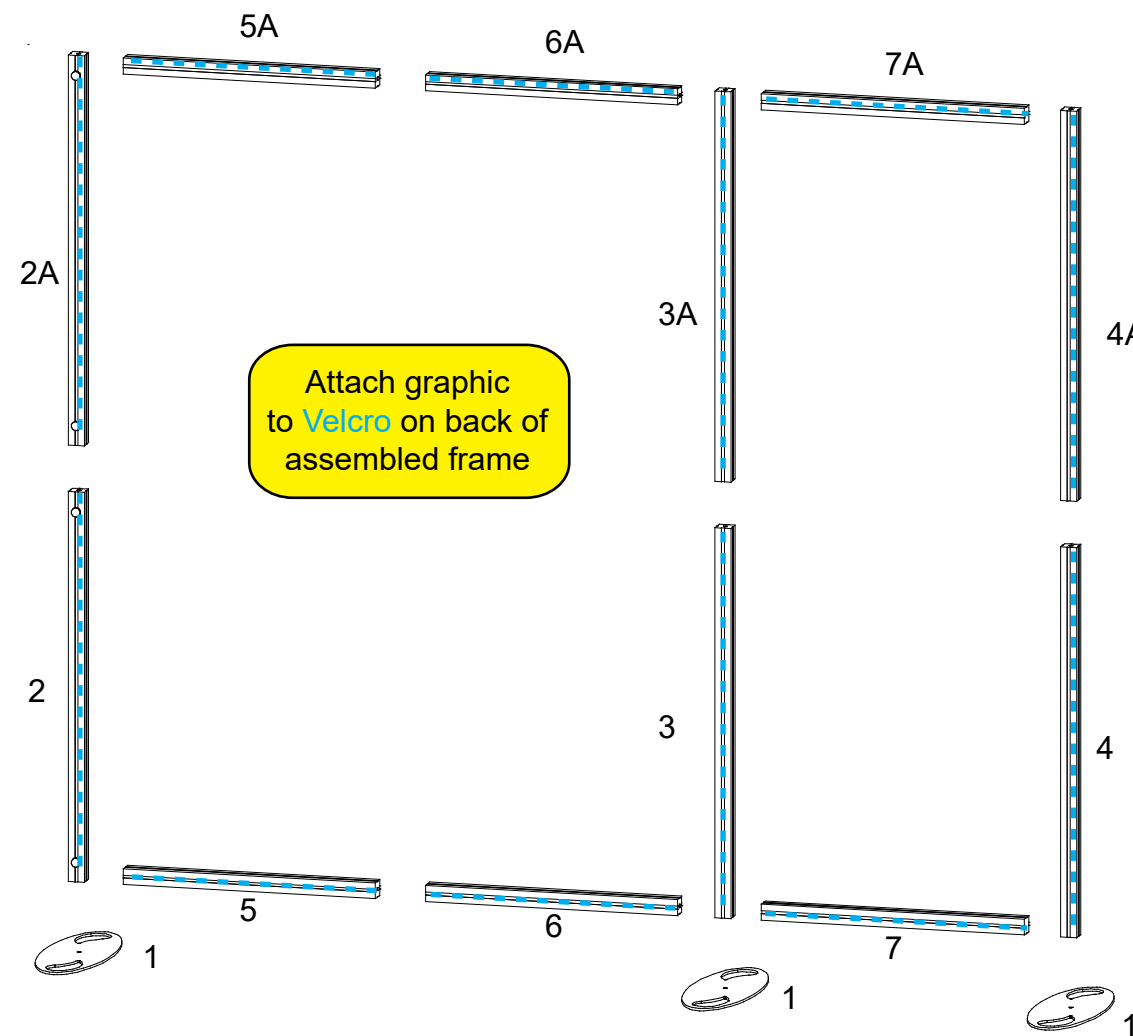



When assembled

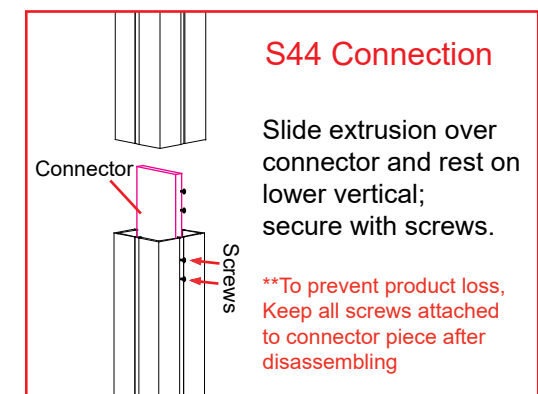

Item	Qty.	Description
8/8A	1/1	11.5"w Z32 Horizontal Extrusion
9	1	32.6"w Z32 Horizontal Extrusion

Steps:

- 1) Connect horizontals [8,8A] to verticals [3,4].
- 2) Attach horizontal [9] between horizontal [8,8A].
- 3) Attach **shelves** to verticals [3A,4A] as shown.
- 4) Install front graphic to verticals [2/2A] using screw caps. See [Graphic to Post Attachment](#) detail.
- 5) Attach wings to verticals [4/4A] using A10 clamps. See [A10 Clamp Attachment](#) detail.
- 6) Connect lights to top of assembly. See [Light Attachment](#) detail.

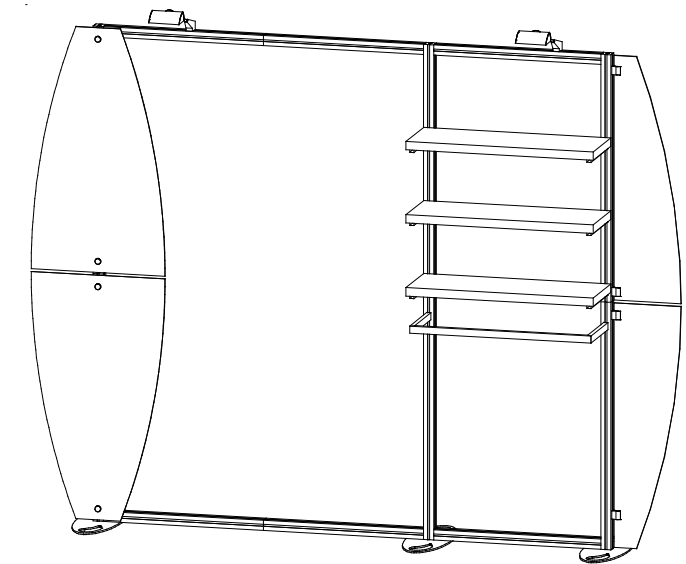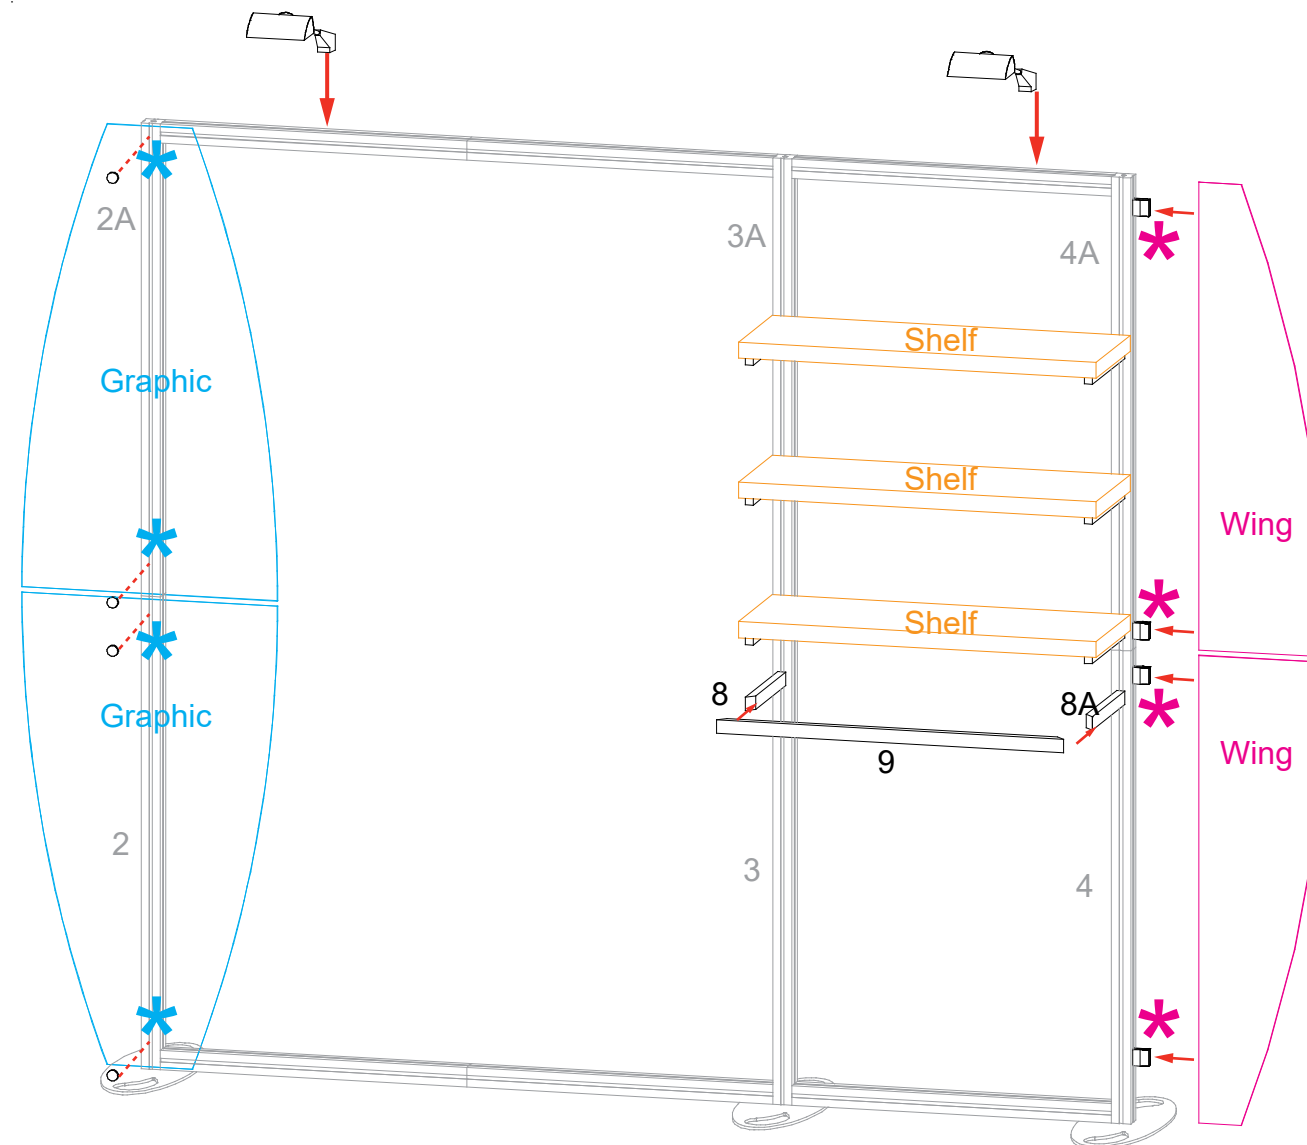

When assembled

