
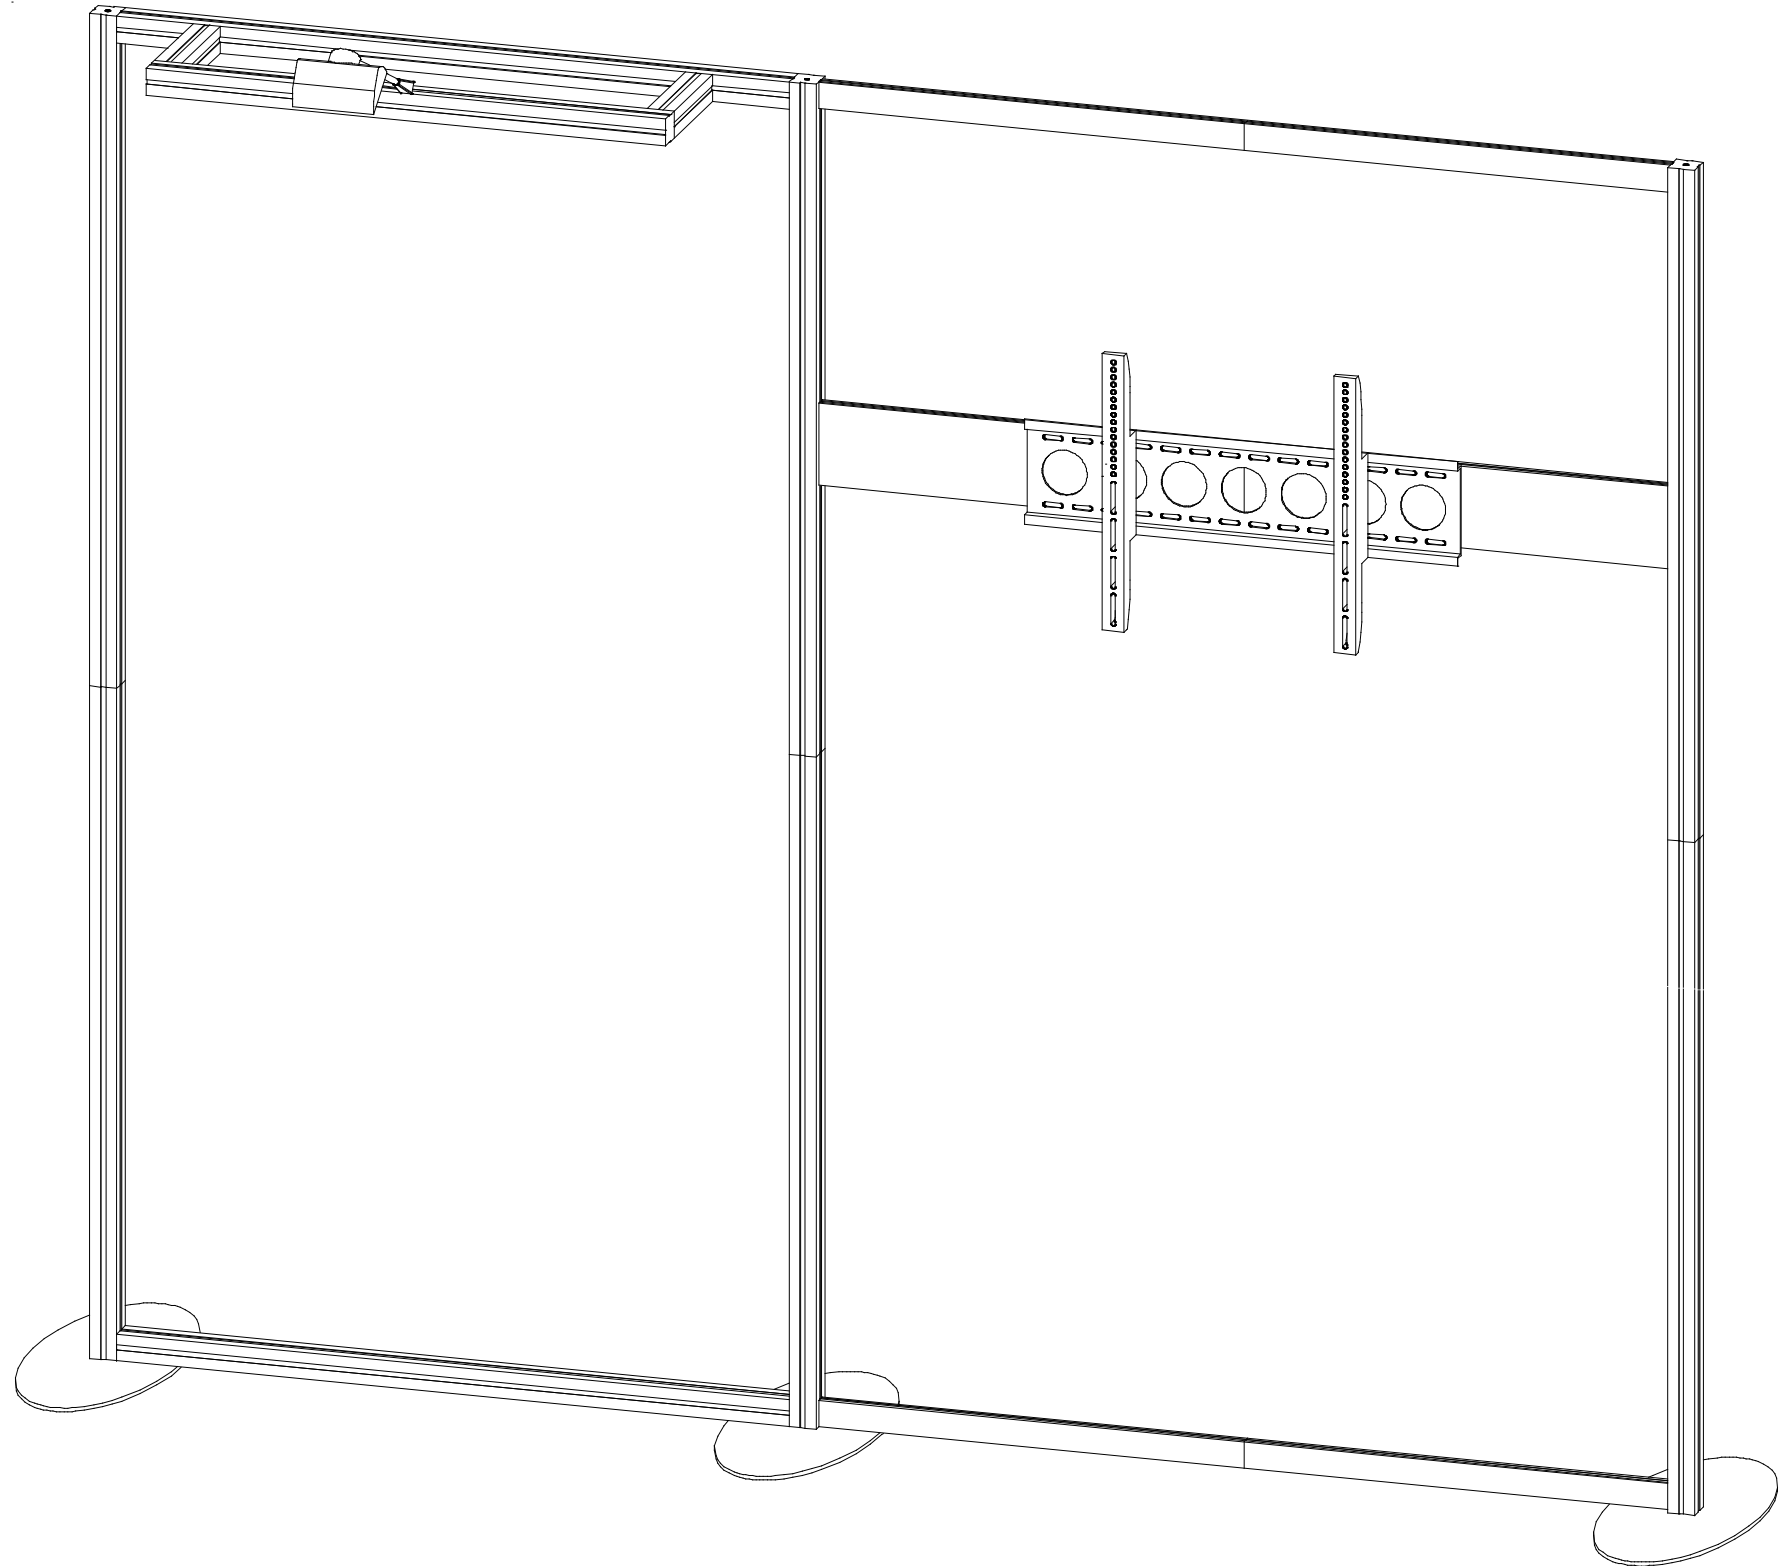


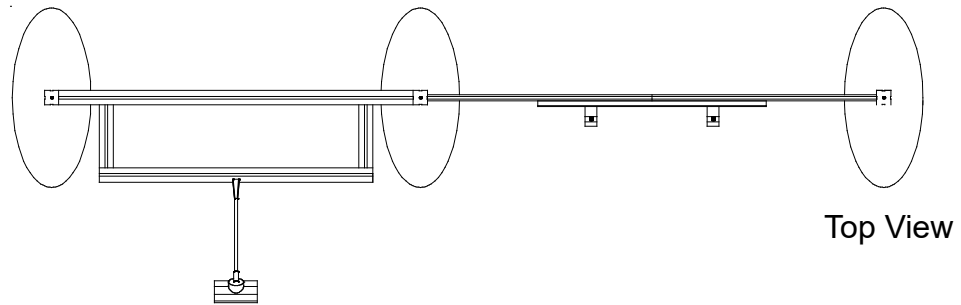

SETUP INSTRUCTIONS

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.
Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

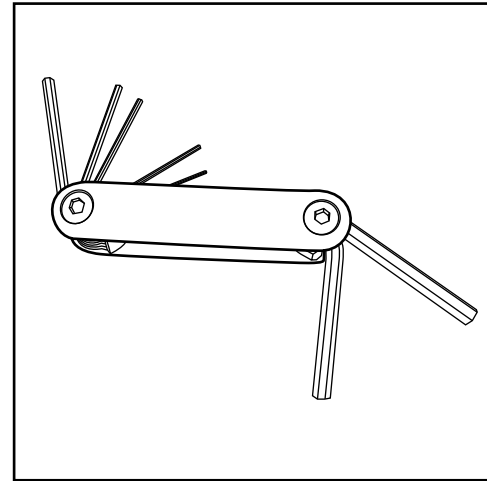


Hex Tool - Essential for Assembly

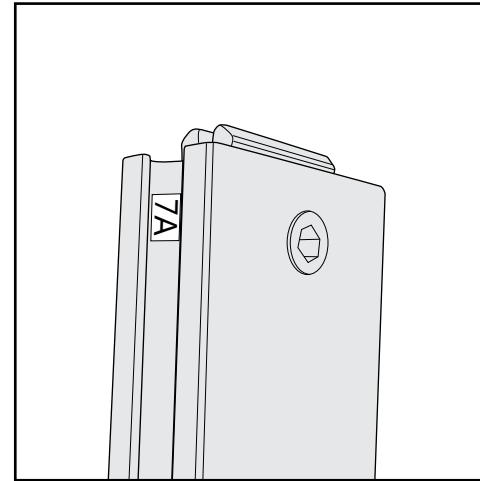


Part Identification - Numbering

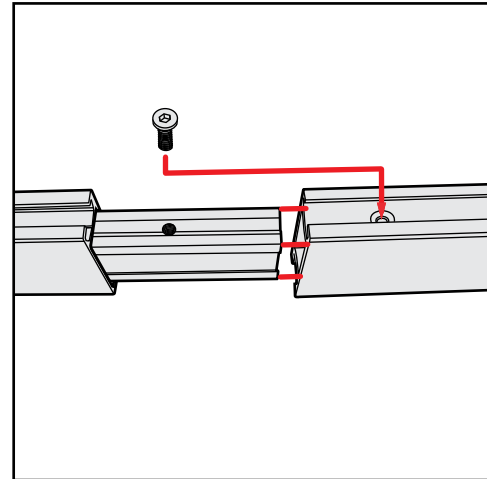


Spline Connection

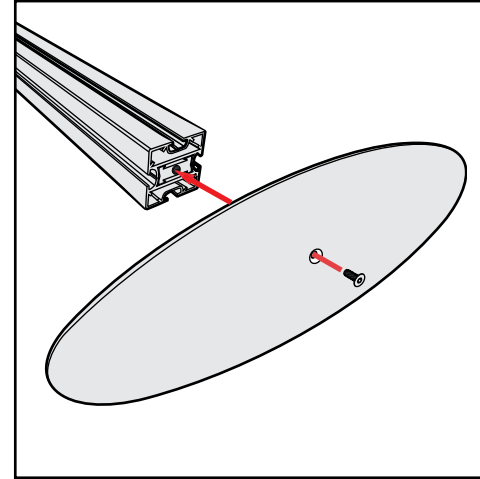

Base Plate & Extrusion Connection

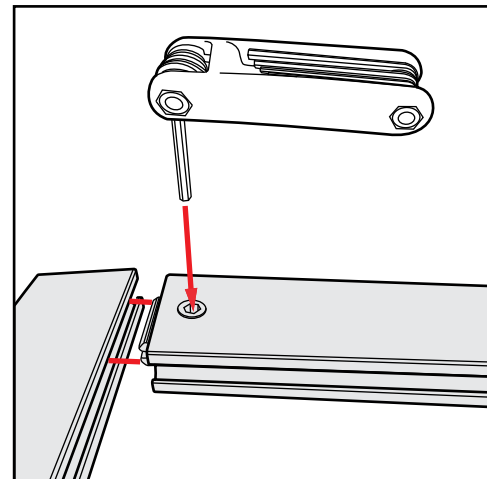

Extrusion & Lock Connection

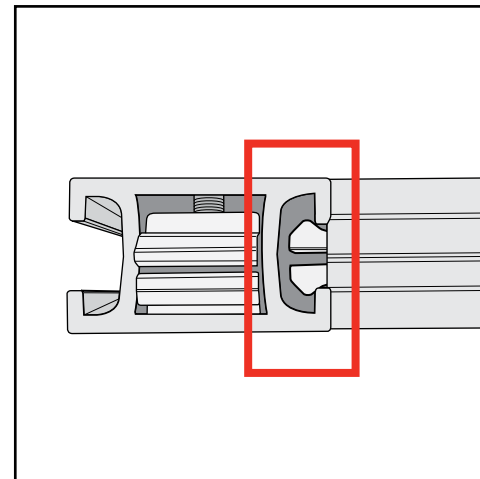


Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED



ALL CONNECTIONS MUST
BE TIGHTLY SECURED



Top View of Each Level

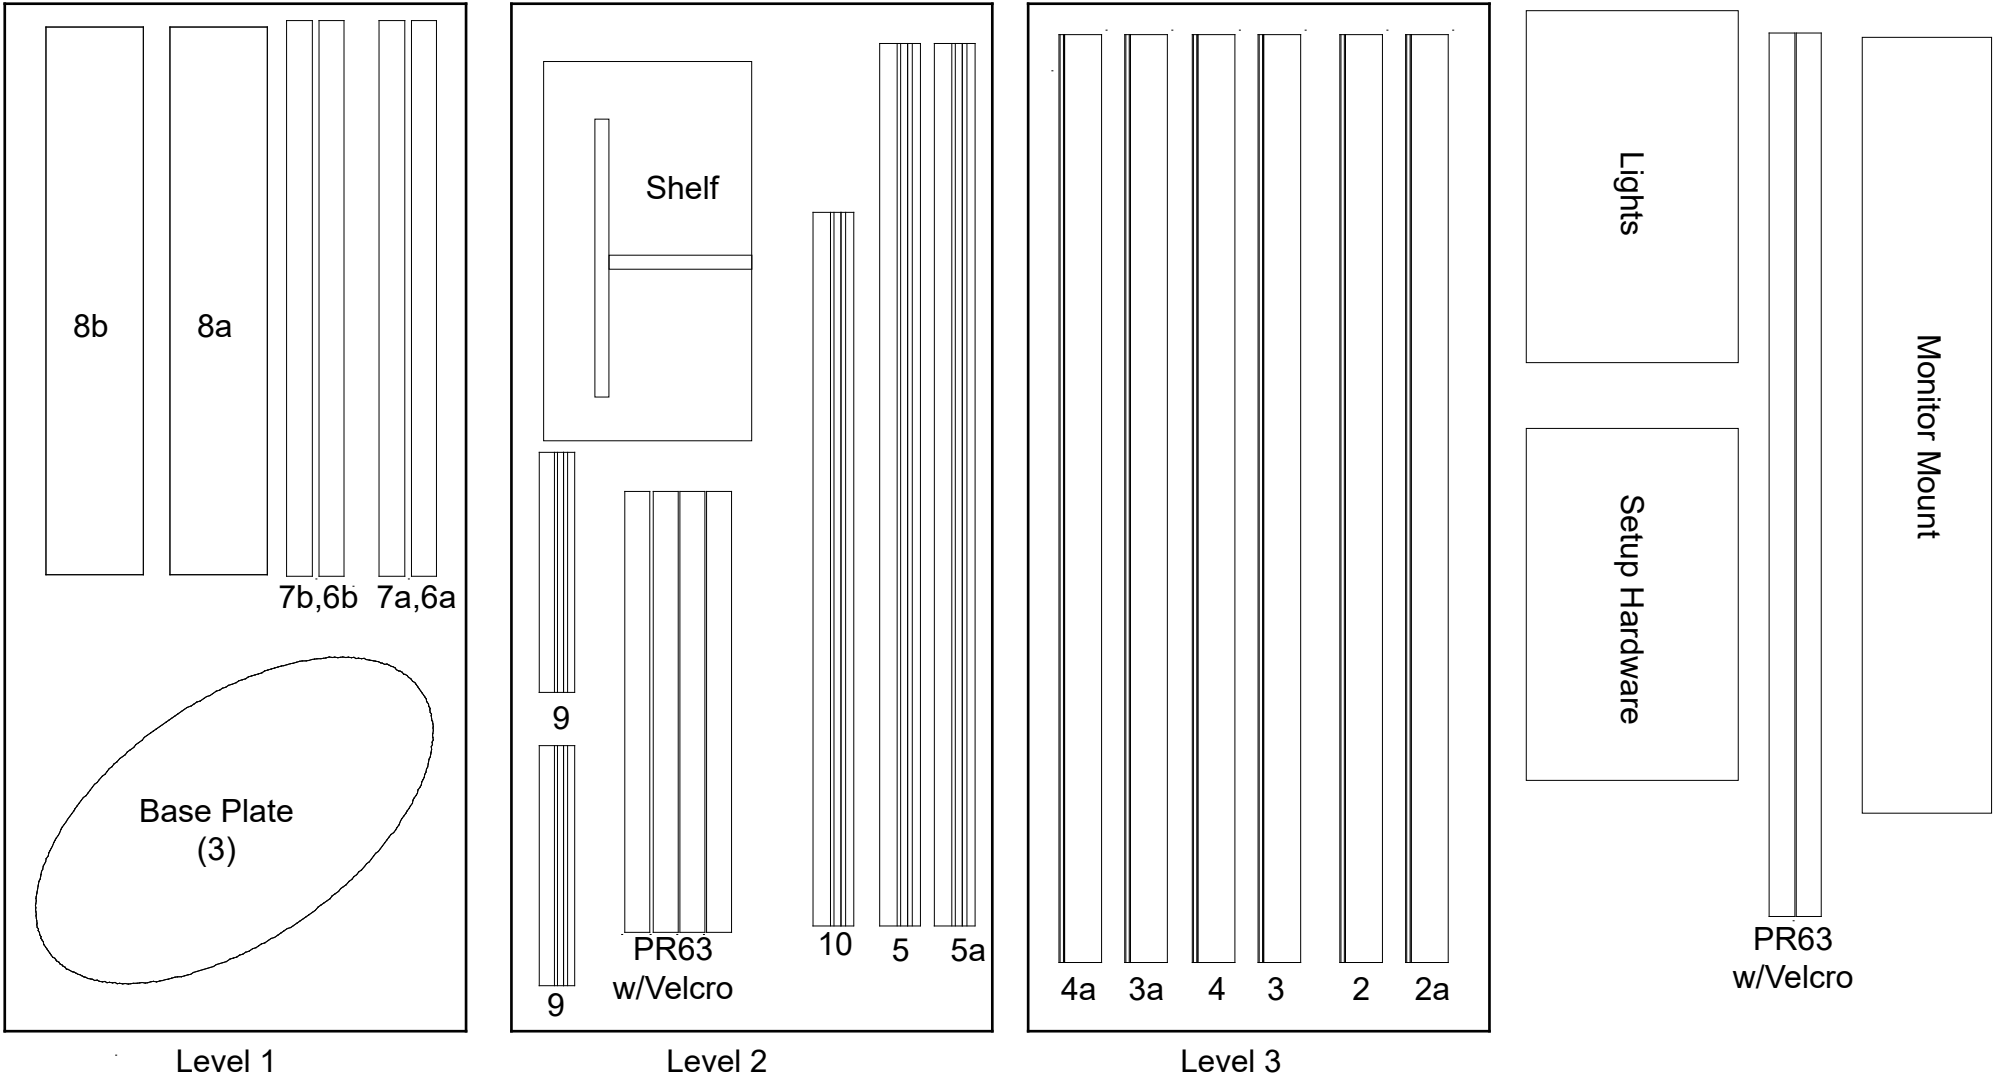

Item	Qty	Description
1	3	Base Plate
2/2a	1/1	45" S44 Vertical Extrusion
3/3a	1/1	45" S44 Vertical Extrusion
4/4a	1/1	45" S44 Vertical Extrusion
5/5a	1/1	45" S44 Horizontal Extrusion
6a/6b	1/1	28.5" Z45 Horizontal Extrusion
7a/7b	1/1	28.5" Z45 Horizontal Extrusion
8a/8b	1/1	28.5" Z140 Horizontal Extrusion

Steps:


- 1) Attach lower vertical extrusions [2,3,4] to base plate [1].
- 2) Attach upper vertical extrusions [2a,3a,4a] to lower vertical extrusions [2,3,4] as shown.
- 3) Connect horizontal extrusions [5,5a] between verticals [2/2a,3/3a] as shown.
- 4) Connect horizontal extrusions [6a,6b] [7a,7b] and [8a,8b] together.
- 5) Attach horizontal assemblies [6a/6b,7a/7b,8a/8b] between vertical assemblies [3/3a,4/4a] as shown.
- 6) Attach graphics to Velcro on backwall as indicated.

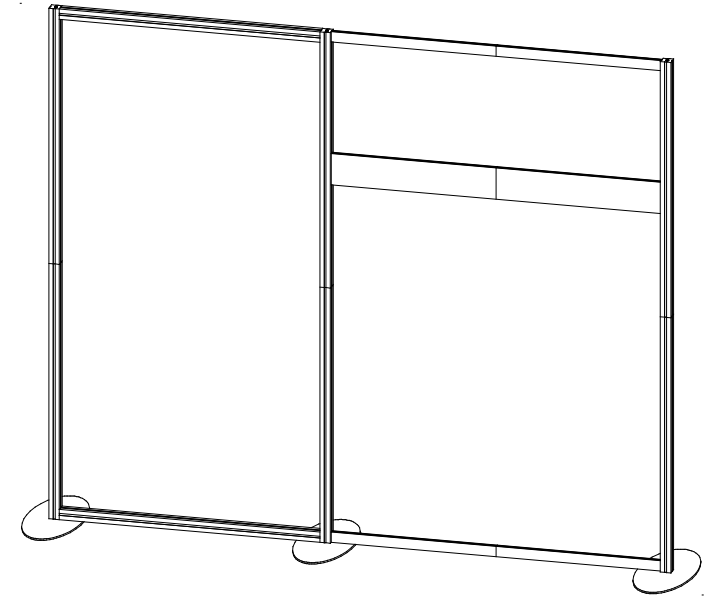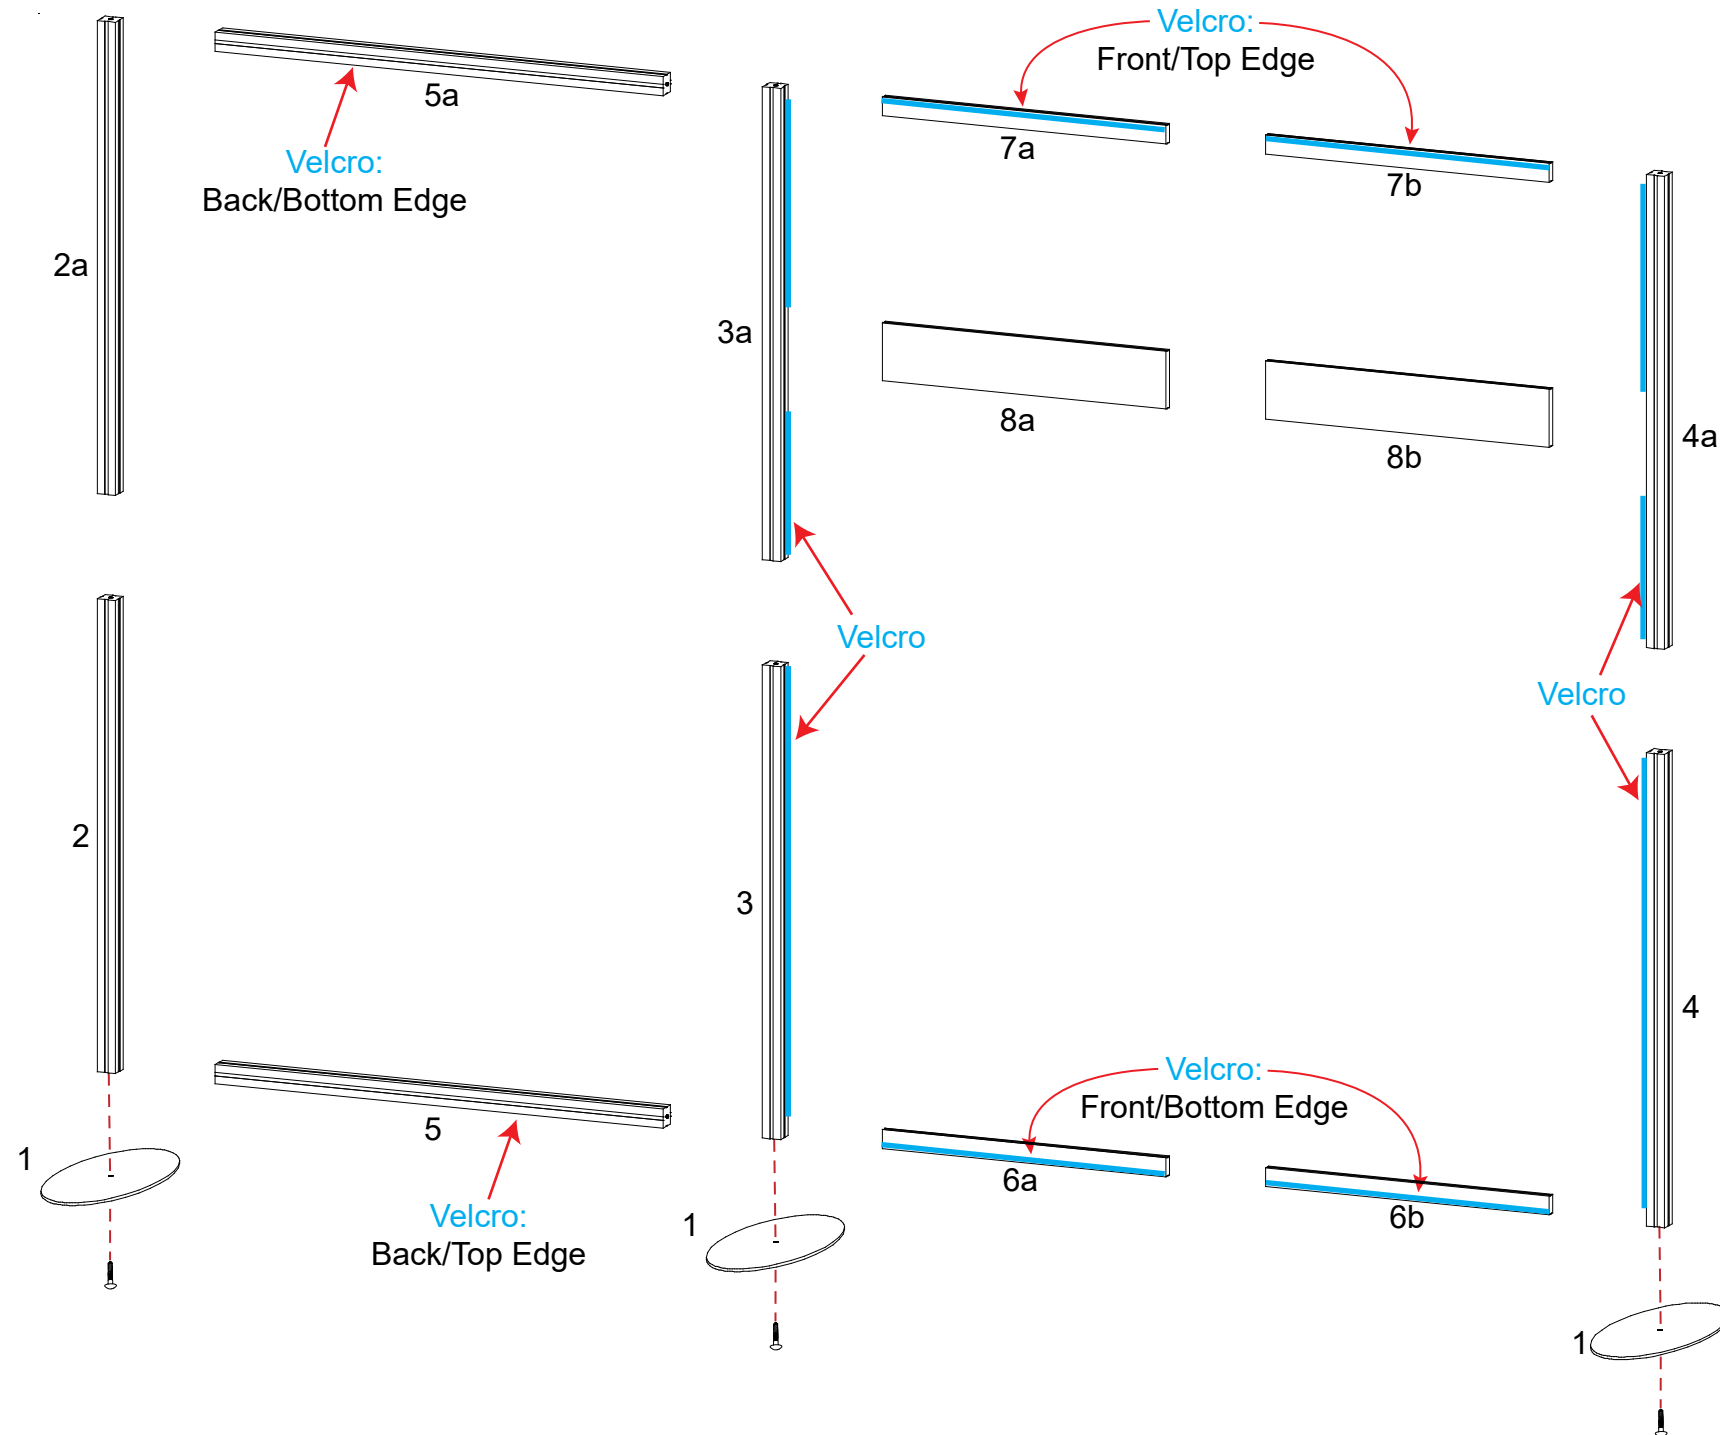

Item	Qty	Description
9	2	8" S44 Horizontal Extrusion
10	1	34.747" S44 Horizontal Extrusion


Steps:

- 1) Connect horizontals [9] between horizontals [5a,10] as shown.
- 2) Attach light to top of horizontal [10] as shown.
- 3) Attach monitor mount to horizontals [8a,8b] as shown in detail.
- 4) Wrap graphic panel around horizontal [10] and attach to velcro on back of horizontal, and attach to bottom of lower horizontal [5]

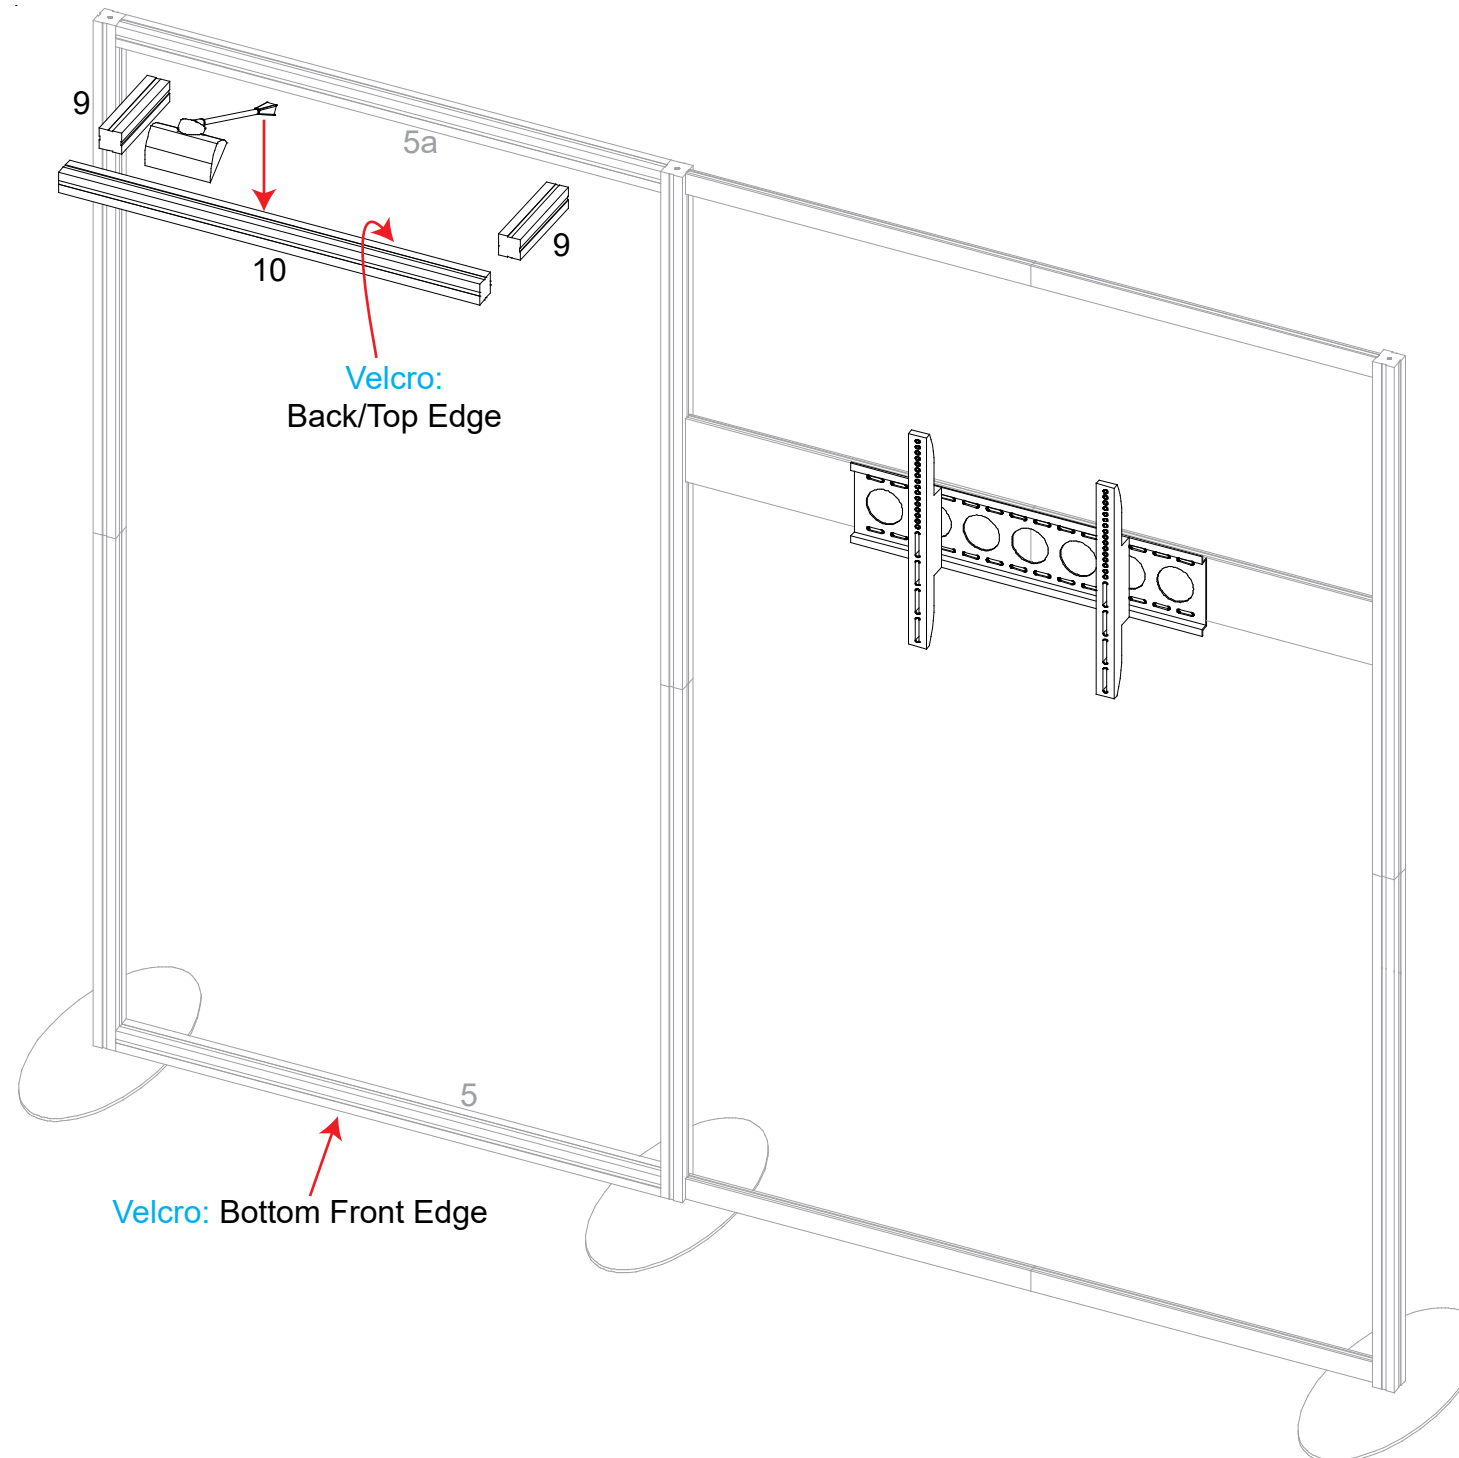

Graphic Panel Attachment:
Wrap graphic panel around horizontal [10] and apply to **velcro** on back of horizontal and bottom of backwall horizontal [5]

Monitor Mount Attachment

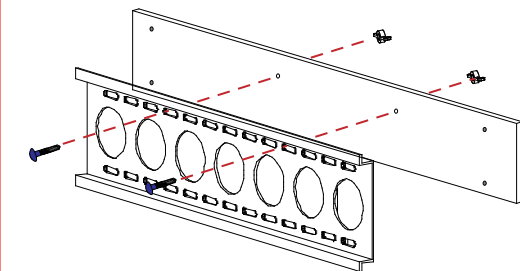

Attach wall plate to plate using bolts and wing nuts.